





493 SERIES

DIN 41612 CONNECTORS

DIN 41612 CONNECTORS

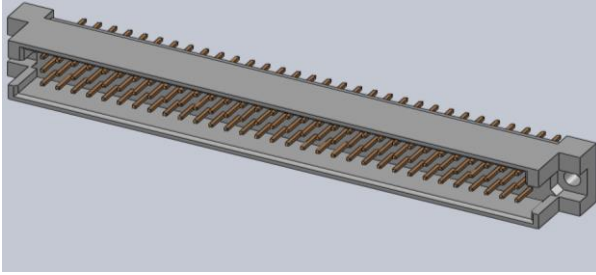

SERIES 493-196-221 -311

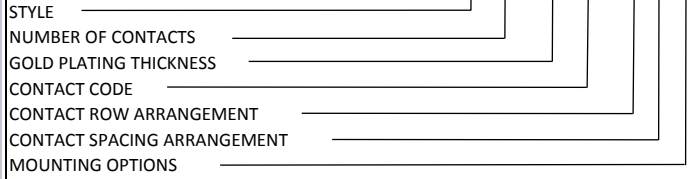

STYLE
1- STANDARD STYLE (STRAIGHT)

GOLD PLATING THICKNESS
2- GOLD FLASH
3- 15 MICROINCHES OF GOLD
6- 30 MICROINCHES OF GOLD



CONTACT CODE
21- PCB TAIL .157 (4.0) LG.
22- PCB TAIL .098 (2.5) LG.
40- W.W. TAIL .512 (13.0) LG.
41- W.W. TAIL .669 (17.0) LG.
70- PRESS-FIT TAIL .182 (4.6) LG.
73- PRESS-FIT TAIL .248 (6.3) LG.
80- PRESS-FIT, W.W.TAIL .512 (13.0) LG.
81- PRESS-FIT, W.W.TAIL .669 (17.0) LG.

CONTACT ROW ARRANGEMENT
1- CONTACTS ON ROW "A"
3- CONTACTS ON ROW "A," "B" AND "C"
6- CONTACTS ON ROW "A" AND "C"

CONTACT SPACING ARRANGEMENT
1- ROWS FULLY LOADED
2- EVEN NUMBER LOADED

MOUNTING OPTIONS
1- ϕ .110" (ϕ 2.80mm), THROUGH HOLE
2- ϕ .098" (ϕ 2.50mm) SIDE MTG. HOLE

PITCH	NUMBER OF CONTACTS	CONTACT ROW ARRANGEMENT	CONTACT SPACING ARRANGEMENT
2.54MM	96	a b c	1- ROWS FULLY LOADED
	48	a b c	
	30	a b c	
	64	a - C	1- ROWS FULLY LOADED
	32	a - C	
	20	a - C	
	32	a --	1- ROWS FULLY LOADED
	16	a --	
10	a --		
5.08MM	48	a b c	2- EVEN NUMBER LOADED
	24	a b c	
	15	a b c	
	32	a - C	2- EVEN NUMBER LOADED
	16	a - C	
	10	a - C	
	16	a --	2- EVEN NUMBER LOADED
	8	a --	
5	a --		

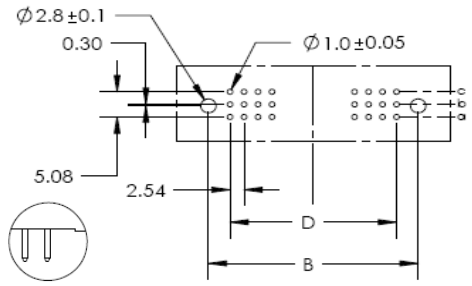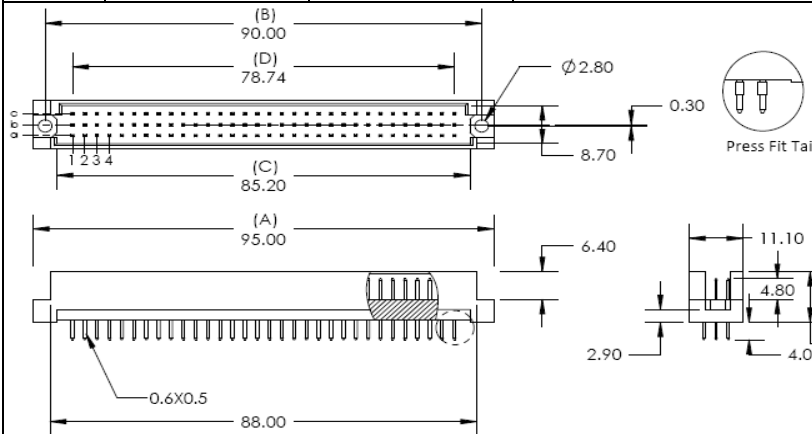

P.C. BOARD PATTERN

Dimension D at 2.54 Pitch:
1 Row: D = No. of Positions-1 X 2.54
2 Rows: D = (No. of Positions/2)-1 X 2.54
3 Rows: D = (No. of Positions/3)-1 X 2.54

Features:

- High density 96 Contact 3 Row Metal-to-Metal Connector on 2.54mm (.100") Grid
- Contact Material and Finish: Brass with selective gold plating and tin on tails:
CLASS 3: 2- Gold Flash Plating
CLASS 2: 3- 15u" of Gold Plating
CLASS 1: 6- 30u" of Gold Plating
- Contact Tails: 0.6 x 0.5mm (.024" x .020")
- Contact Spacing: 2.54 x 2.54mm (.100" x .100") single, double or triple rows; or 2.54 x 5.08mm (.100" x .200") single, double or triple rows.
- Available in: 5, 8, 10, 15, 16, 20, 24, 30, 32, 48, 64, and 96 positions
- Connectors designed to meet DIN 41612-R (Male) specifications

Specifications:

- Current Rating: 2 Amperes @ 20°C
- Contact Material: Brass
- Contact Plating: Selective Gold Plating
- Contact Resistance: 30 milliohms, maximum
- Insulator Material: 30% Glass Filled PBT, UL 94V-0
- Insulation Resistance: Mated - 1000 Mega (10⁶) ohms
- Dielectric Withstanding Voltage: 1000 V.A.C RMS
- Basic Grid: 2.54mm (.100")
- Operating Temperature: -55°C to +105°C