


Card Guides

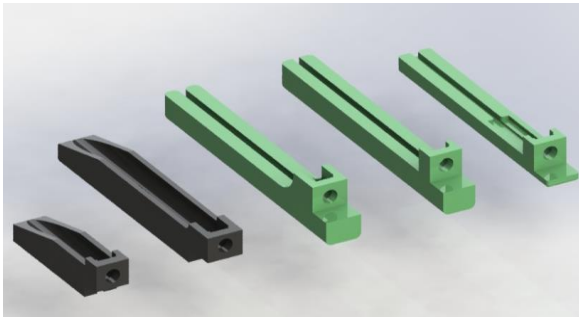


FEATURES:

- Accepts .062" (1.57) Nominal Thickness P.C. Board
- For Field Assembly of Card Guides to a Connector with Code 04 Mouting- .156(3.96) Dia. Mounting Holes. Use an Alignment Bushing Part Number 345-250-442-102, a Hex or Round Head Screw, Washer and Nut to hold the Assembly to a Circuit Board.

Specifications:

Guide Material	Thermoplastic Polyester, UL94V-0, Green, Black Color Available Upon Request
Operating Temperature	-65C to +105°C

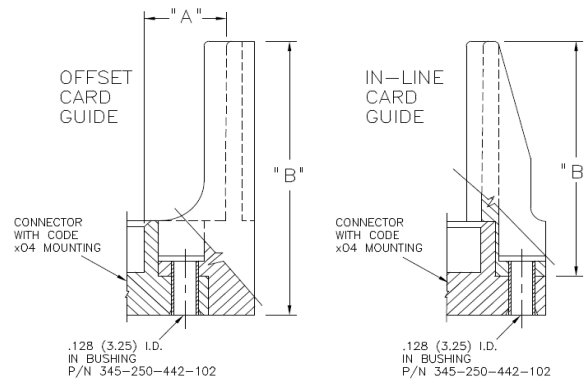

307/317/345/346 SERIES CARD GUIDES

Part Number	Style	"A"	"B"	Used for Connector Series
307-220-058	Offset	.468(11.89)	3.000(76.20)	305, 306, 307, 315,
307-220-068	Offset	.344(8.74)	2.750(69.85)	316, 337, 338, 355,
307-220-078	In-Line	—	1.550(39.37)	356, 357, 387
317-220-078	In-Line	—	1.712(43.48)	317
345-220-058	Offset	.468(11.89)	3.000(76.20)	345, 395
345-220-078	In-Line	—	2.750(69.85)	
345-220-088	In-Line	—	1.250(31.75)	
346-220-058	Offset	.468(11.89)	3.000(76.20)	346, 396
346-220-078	In-Line	—	2.750(69.85)	

Ordering Code Notes:

- 1) Card guide part number 307-220-078 is not suitable for 337 or 387 series connectors with flush mouting lugs.
- 2) Card guide part number 346-220-078 is not suitable for 346 or 396 series connectors with flush mouting lugs.