



### FEATURES:



- Header posts can be cut to any height and board depth
- Wide Variety of plating options.
- Vertical Right Angle or Custom bends.
- Breakaway design allows for easy separation into smaller units.
- Sockets available with right angle and SMT contacts.
- Coloured insulators are available
- Wide range of custom capabilities and options.
- High Temperature Materials are available.
- 200 Mating Cycles Minimum
- RoHS Compliant

### Specifications:

Insulator Material	UL 94V-0 Thermoplastic Polyester
Contact Material	Copper Alloy
Contact Plating	Selective Gold Plating over Nickel with Tin Plated Tails
Current Rating	Various, Depending On Connector
Contact Resistance	10 milliohms maximum
Dielectric Withstand Voltage	Various, Depending On Connector
Insulation Resistance	1000 Megohms minimum
Operating Temperature	Operating Temperature: -40°C to +105°C



### 150-XXX-XXX-XXX

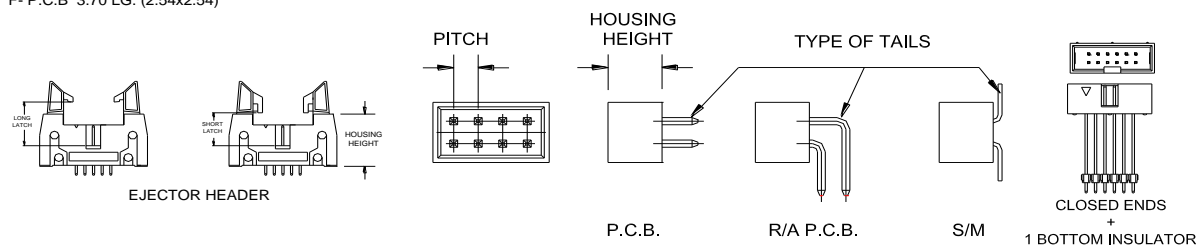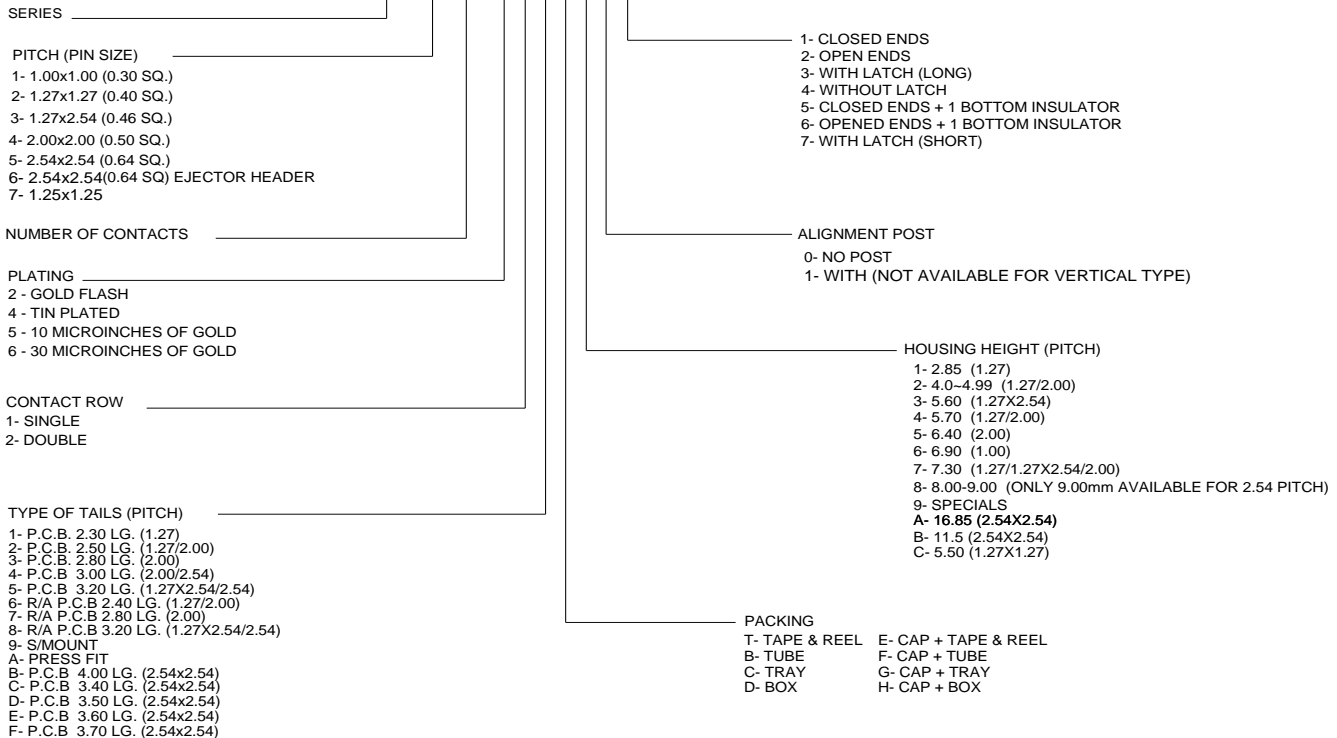




### FEATURES:

- Header posts can be cut to any height and board depth
- Wide Variety of plating options.
- Vertical Right Angle or Custom bends.
- Breakaway design allows for easy separation into smaller units.
- Sockets available with right angle and SMT contacts.
- Coloured insulators are available
- Wide range of custom capabilities and options.
- High Temperature Materials are available.
- 200 Mating Cycles Minimum
- RoHS Compliant

### Specifications:

Insulator Material	UL 94V-0 Thermoplastic Polyester
Contact Material	Copper Alloy
Contact Plating	Selective Gold Plating over Nickel with Tin Plated Tails
Current Rating	Various, Depending On Connector
Contact Resistance	10 milliohms maximum
Dielectric Withstand Voltage	Various, Depending On Connector
Insulation Resistance	1000 Megohms minimum
Operating Temperature	Operating Temperature: -40°C to +105°C

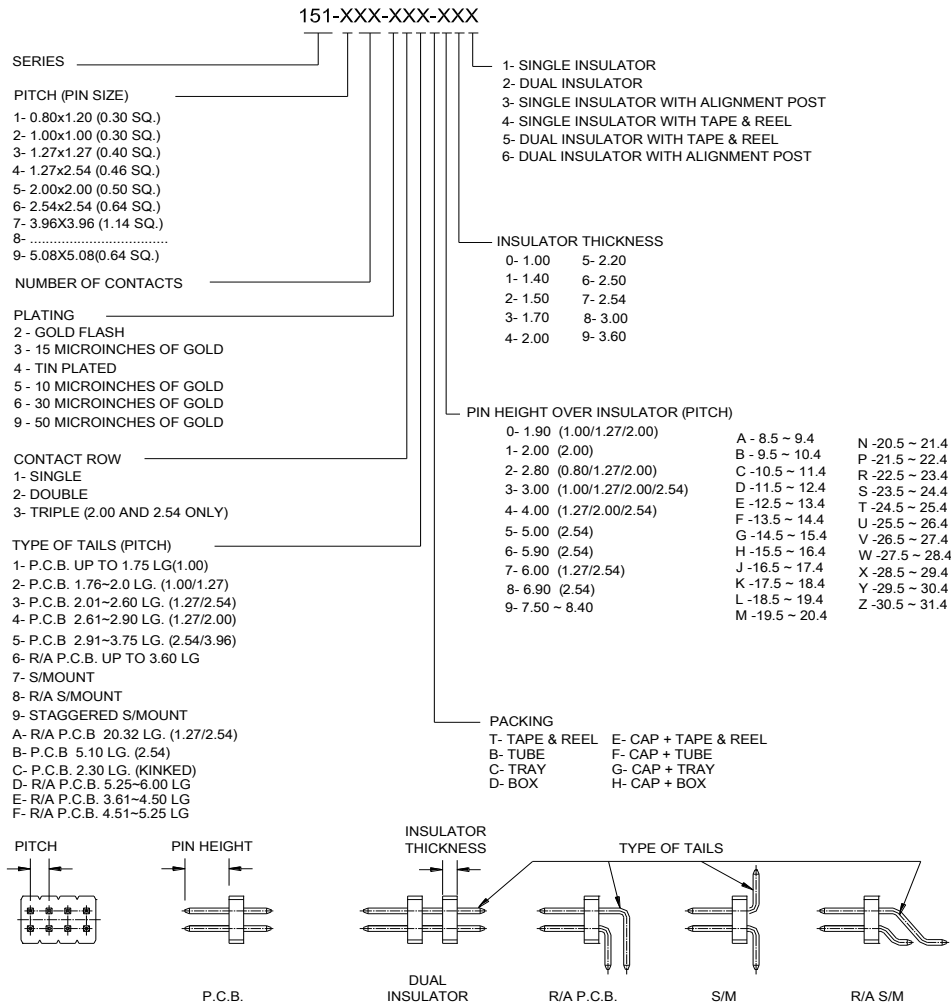



### FEATURES:

- Header posts can be cut to any height and board depth
- Wide Variety of plating options.
- Vertical Right Angle or Custom bends.
- Breakaway design allows for easy separation into smaller units.
- Sockets available with right angle and SMT contacts.
- Coloured insulators are available
- Wide range of custom capabilities and options.
- High Temperature Materials are available.
- 200 Mating Cycles Minimum
- RoHS Compliant

### Specifications:

Insulator Material	UL 94V-0 Thermoplastic Polyester
Contact Material	Copper Alloy
Contact Plating	Selective Gold Plating over Nickel with Tin Plated Tails
Current Rating	Various, Depending On Connector
Contact Resistance	10 milliohms maximum
Dielectric Withstand Voltage	Various, Depending On Connector
Insulation Resistance	1000 Megohms minimum
Operating Temperature	Operating Temperature: -40°C to +105°C

